
Sonesse® 30 RTS 24V DC

Item #:1241142

Technical Features



Class 3

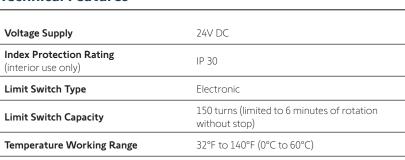

17.5 cm wire length, must not be cut or lengthened. For greatest RF range, antenna must be exposed and should not come in contact with metal surfaces. RF wire may need to be repositioned for optimal performance.

YEARS



Offers control via Radio Technology Somfy® (RTS)

Certifications





Dimensions

Insulation Class



Maximum width: up to 110" x 120" (fabric limitations)

Minimum width: 21 1/2"

Includes transformer; 24V DC, 1.66 A

Specifications

Voltage	24V DC
Rated current	.625 A
Standby power	.2W
Torque	2 Nm
Default speed	25 rpm
Speed range	6 to 28 rpm (speed regulated and adjustable)
Radio frequency	433.42 MHz
Thermal protection	6 minutes
Sound Level*	<42 dBA

Power Level: according to standards ISO3741 in dB(A) ref 1pW typical value, at nominal torque and nominal speed, without application/end product.

Fabrication recommendations:

- Operational noise level is reduced when motor, tube, and mechanical accessories are properly adapted to motorized applications.
- Free play must be minimized between the accessories and the end product tube to ensure quiet performance of the motor.
- Interior Tube Diameter (ID) > 31 mm must be respected.
- A motor crown adaptor between motor and end product tube is required to ensure concentric operation of motor.
- Sonesse 30 Series drive stop and screw (included with crown and drive) are recommended to prevent noise and drive wheel separation from motor shaft.

Type of power cable

24V DC Power Cable

AWG24 - 1 Cable: 2 wire (9.8 in. Weidmüller pigtail non-removable)





Maximum Power Cable Lenath (to guarantee characteristics)

Length
240 ft.
150 ft.
100 ft.



