




POLAR SHADES

sun control

| ... OMEGA 0%/1%/3%5% ... |

OMEGA

Omega is a popular fabric known for its simplicity of design, balanced weave, application versatility, and overall excellent solar control performance. All colors are available in openness factors 1%, 3%, and 5% for ultimate daylight control.




RO LLER
SH AD ES




RO MA N
SH AD ES




PANE L
TR AC KS




SK YLIGHT
TR AC KS

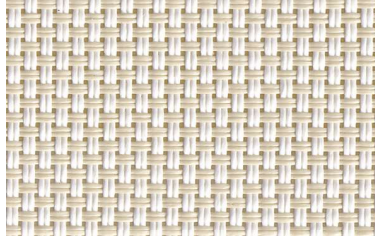


WHITE/LINEN SC-A2-02 (0%&1%&3%&5%)

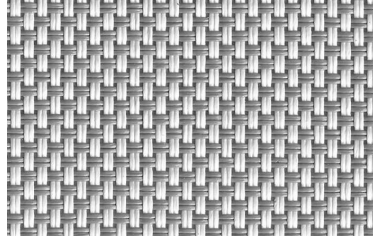


WHITE/GRAY SC-A2-03 (0%&1%&3%&5%)

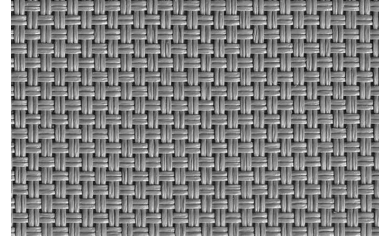


GRAY/GRAY SC-A2-06 (0%&1%&3%&5%)

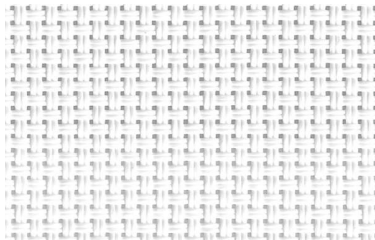


WHITE/WHITE SC-A2-01 (0%&1%&3%&5%)

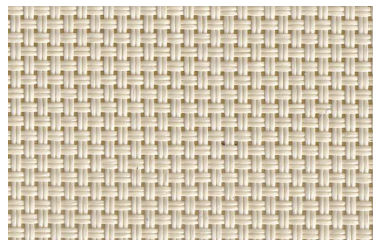


TAN/TAN SC-A2-04 (0%&1%&3%&5%)

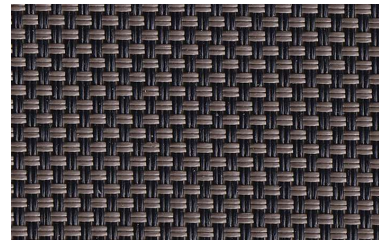

BLACK/BRONZE SC-A2-08 (0%&1%&3%&5%)

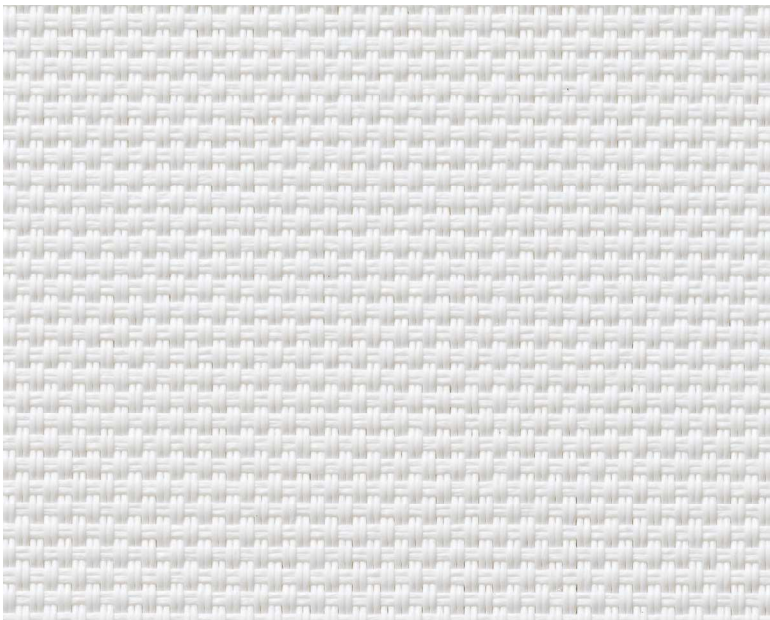

BRIGHT WHITE SC-A2-00 (0%&1%&3%&5%)

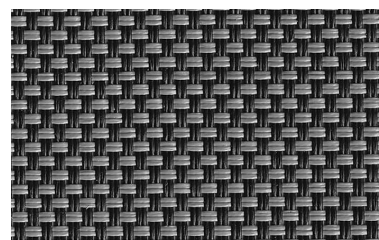

BLACK/GRAY SC-A2-10 (0%&1%&3%&5%)



BLACK/BLACK SC-A2-11 (0%&1%&3%&5%)

FABRICATION METHODS

Cutting: Cold Cut, Ultrasonic, Crush Cut or Laser
Seaming / Hemming: Thermal, High-Frequency, Ultrasonic or Sewing.

PRODUCT SPECIFICATIONS

	OPENNESS FACTOR 0%	OPENNESS FACTOR 1%	OPENNESS FACTOR 3%	OPENNESS FACTOR 5%
COMPOSITION	30% Polyester + 70% PVC	30% Polyester + 70% PVC	30% Polyester + 70% PVC	30% Polyester + 70% PVC
ROLL WIDTH	98" / 118"	98" / 118"	98" / 118"	98" / 118"
ROLL LENGTH	33 yd	33 yd	33 yd	33 yd
WEIGHT / YD ²	17.99 oz /yd ²	13.84 oz /yd ²	12.96 oz /yd ²	12.08 oz/yd ²
THICKNESS032" ± 5%	.030" ± 5%	.026" ± 5%	.022" ± 5%
COLOR FASTNESS	8 Grade (SGS)	8 Grade (SGS)	8 Grade (SGS)	8 Grade (SGS)
YARN COUNT	60*42	64*40	54*44	48*46
BREAKING STRENGTH	Warp 3840 N/ 5cm Weft 990 N/5cm	Warp 2060 N/ 5cm Weft 1300 N/5cm	Warp 1800 N/5cm Weft 1434 N/5cm	Warp 1600 N/5cm Weft 1500 N/5cm

CARE AND CLEANING

Remove dust with vacuum cleaner or compressed air. Do not scrub. Do not use solvents or any abrasive substance which might damage the coating on the fabric. Clean with a sponge or a soft brush dipped in soapy water using mild detergent. Rinse with clean water. Leave the shade down until completely dry. You can also rub the fabric very gently with a clean white pencil eraser to remove small stains.

CERTIFICATIONS, TESTS, AND WARRANTY

CALIFORNIA TITLE 19	OEKO-TEX® STANDARD 100	UL GREENGUARD GOLD	ROHS COMPLIANT	10 YEAR WARRANTY	ASTM G-21 & E-2180	NFPA® 701-TM
FLAME RETARDANT	FREE OF HARMFUL CHEMICALS	HEALTHY INDOOR AIR QUALITY	FREE OF HARMFUL METALS	QUALITY GUARANTEED	BACTERIA & FUNGAL RESISTANCE	FIRE RETARDANT